

Hybrid Tap-off Closure for FTTH solution



www.nurifons.com



NURIFONS

Leading global market

Prepare the Future

with NURIFONS solutions

Since its founding in 2009, NURIFONS has acted from a corporate philosophy of contributing to the development of the global industry through technology and has been focusing on strengthening competitive power.

Through this strategy, we developed product differentiation for FTTH solutions.

Featured Solution

- *FTTH Closure*
- *Termination Panel (OTP)*
- *PLC Splitter*
- *CWDM / DWDM*
- *Optical Assembly*
- *Optical Distribution System*

Solution overview



- Master & Slave closure function
- Splitter & adaptor pre-installed
- FTTH fully optimized

Main F/O Cable


Master closure

Aerial install

Drop Cable



Wall install



In-building install



NR-HOTB-9616 (Aerial)



Model	NR-HOTB-9616
Dimension (mm)	290L x 200W x 130D
Main cable port	12ports (6 in-6 out) , Ø5~13mm
Drop cable port	16ports, Ø1.9-3.0mm
Splicing tray	4pcs, 1tray/24fiber
Max. splicing	96fiber (24fiber x 4 trays)
Splitter holder	3ea / tray
Adaptor capabilities	SC/PC or SC/APC adaptor 16ea
Splice protector	Heat shrinkable sleeve
Protection level	IP65

NR-HOTB-WALL (Wall)



Model	NR-HOTB-WALL
Dimension (mm)	240L x 137W x 52D
Main cable port	2port (1 in-1 out), Ø5~13mm
Drop cable port	8ports, Ø1.9-3.0mm
Splicing tray	1bottom tray / 12fiber
Max. splicing	12fiber
Splitter holder	2ea / bottom tray
Adaptor capabilities	SC/PC or SC/APC adaptor 8ea
Splice protector	Heat shrinkable sleeve
Protection level	IP65

Hybrid Tap-off Closure

NR-HOTB-7208 (Aerial)




Model	NR-HOTB-7208
Dimension (mm)	290L x 190W x 110D
Main cable port	8(4 in-4 out), Ø 5~14
Drop cable port	8ports, Ø1.9-3.0mm
No. of tray	1 ea (Max.3 ea)
Max. splicing	Max. 72fiber (24fiber x 3)
Splitter holder	2ea / tray
Adaptor capabilities	SC/PC or SC/APC adaptor 8ea
Splice protector	Heat shrinkable sleeve
Protection level	IP65

Wall / Rack type



[NR-Wall-S-32]

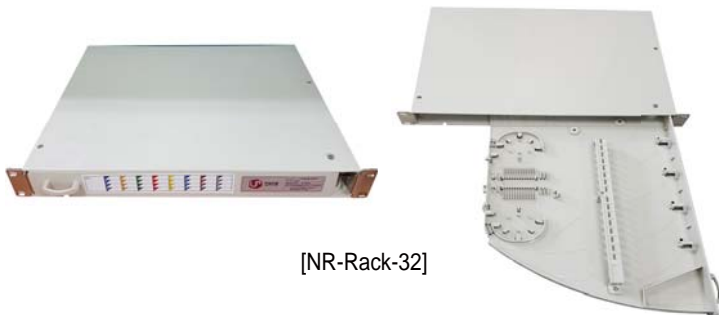

[NR-Rack-32]

Type	NR-Wall-S-32	NR-Rack-32	NR-IDF-0108
Dim. (LxWxD, mm)	300Lx330Wx52D	434Lx310Wx44D	65Lx170Wx65D
PLC Splitter		1x2 ~1x32, 2x2 ~2x32	1x2 ~1x8
Connector	SC/PC, SC/APC		



[NR-IDF-0108]

NR-HOTB-WTB0808 (Wall mount type)



Model	NR-HOTB-WTB0808
Dimension (mm)	180Lx120Wx50D
Main cable port	2ports(1in-1out), Ø5~11mm
Drop cable port	8ports, Ø1.9-3.0mm
Max. splicing	8fiber
Splitter holder	1ea / bottom holder
Adaptor capabilities	SC/APC adaptor 8ea
Splice protector	Heat shrinkable sleeve
Protection level	IP65

NR-HOTB-MS0808 (Wall mount type)



Model	NR-HOTB-MS0808
Dimension (mm)	234Lx137Wx54D
Main cable port	4port (2-in, 2-out), Ø5~11mm
Drop cable port	8ports, Ø1.9-3.0mm
Max. splicing	8fiber
Splitter holder	1ea / bottom holder
Adaptor capabilities	SC/APC adaptor 8ea
Splice protector	Heat shrinkable sleeve
Protection level	IP65



NURIFONS Co., Ltd.

e-mail : nrs1@nurifons.com

(주)누리폰즈

본 사:

경기도 군포시 엘에스로 13 신일 IT 유토 1001호
전화 : 031-427-6031 팩스 : 031-427-6032

대전공장 :

대전광역시 대덕구 대화동 40-29
전화 : 042-636-7417 팩스:042-636-7416

NURIFONS Co., Ltd.

Head office :

Shinil-IT Uto 1001, 13 LS-ro, Gunpo-Si, Gyeonggi-do, Korea
Tel : +82-31-427-6031 Fax : +82-31-427-6032

Factory :

40-29, Daehwa-dong Daedeok-gu Daejeon, Korea
Tel : +82-42-636-7417 Fax : +82-42-636-7416